


APPROVAL  
WATERSHED MANAGEMENT DIVISION  
DATE 05/28/2015  
BY [Signature]  
THIS APPROVAL IS SUBJECT TO THE TERMS  
AND CONDITIONS OF STREAM ALTERATION  
PERMIT # 52-06-21-2015 ISSUED HEREWITH

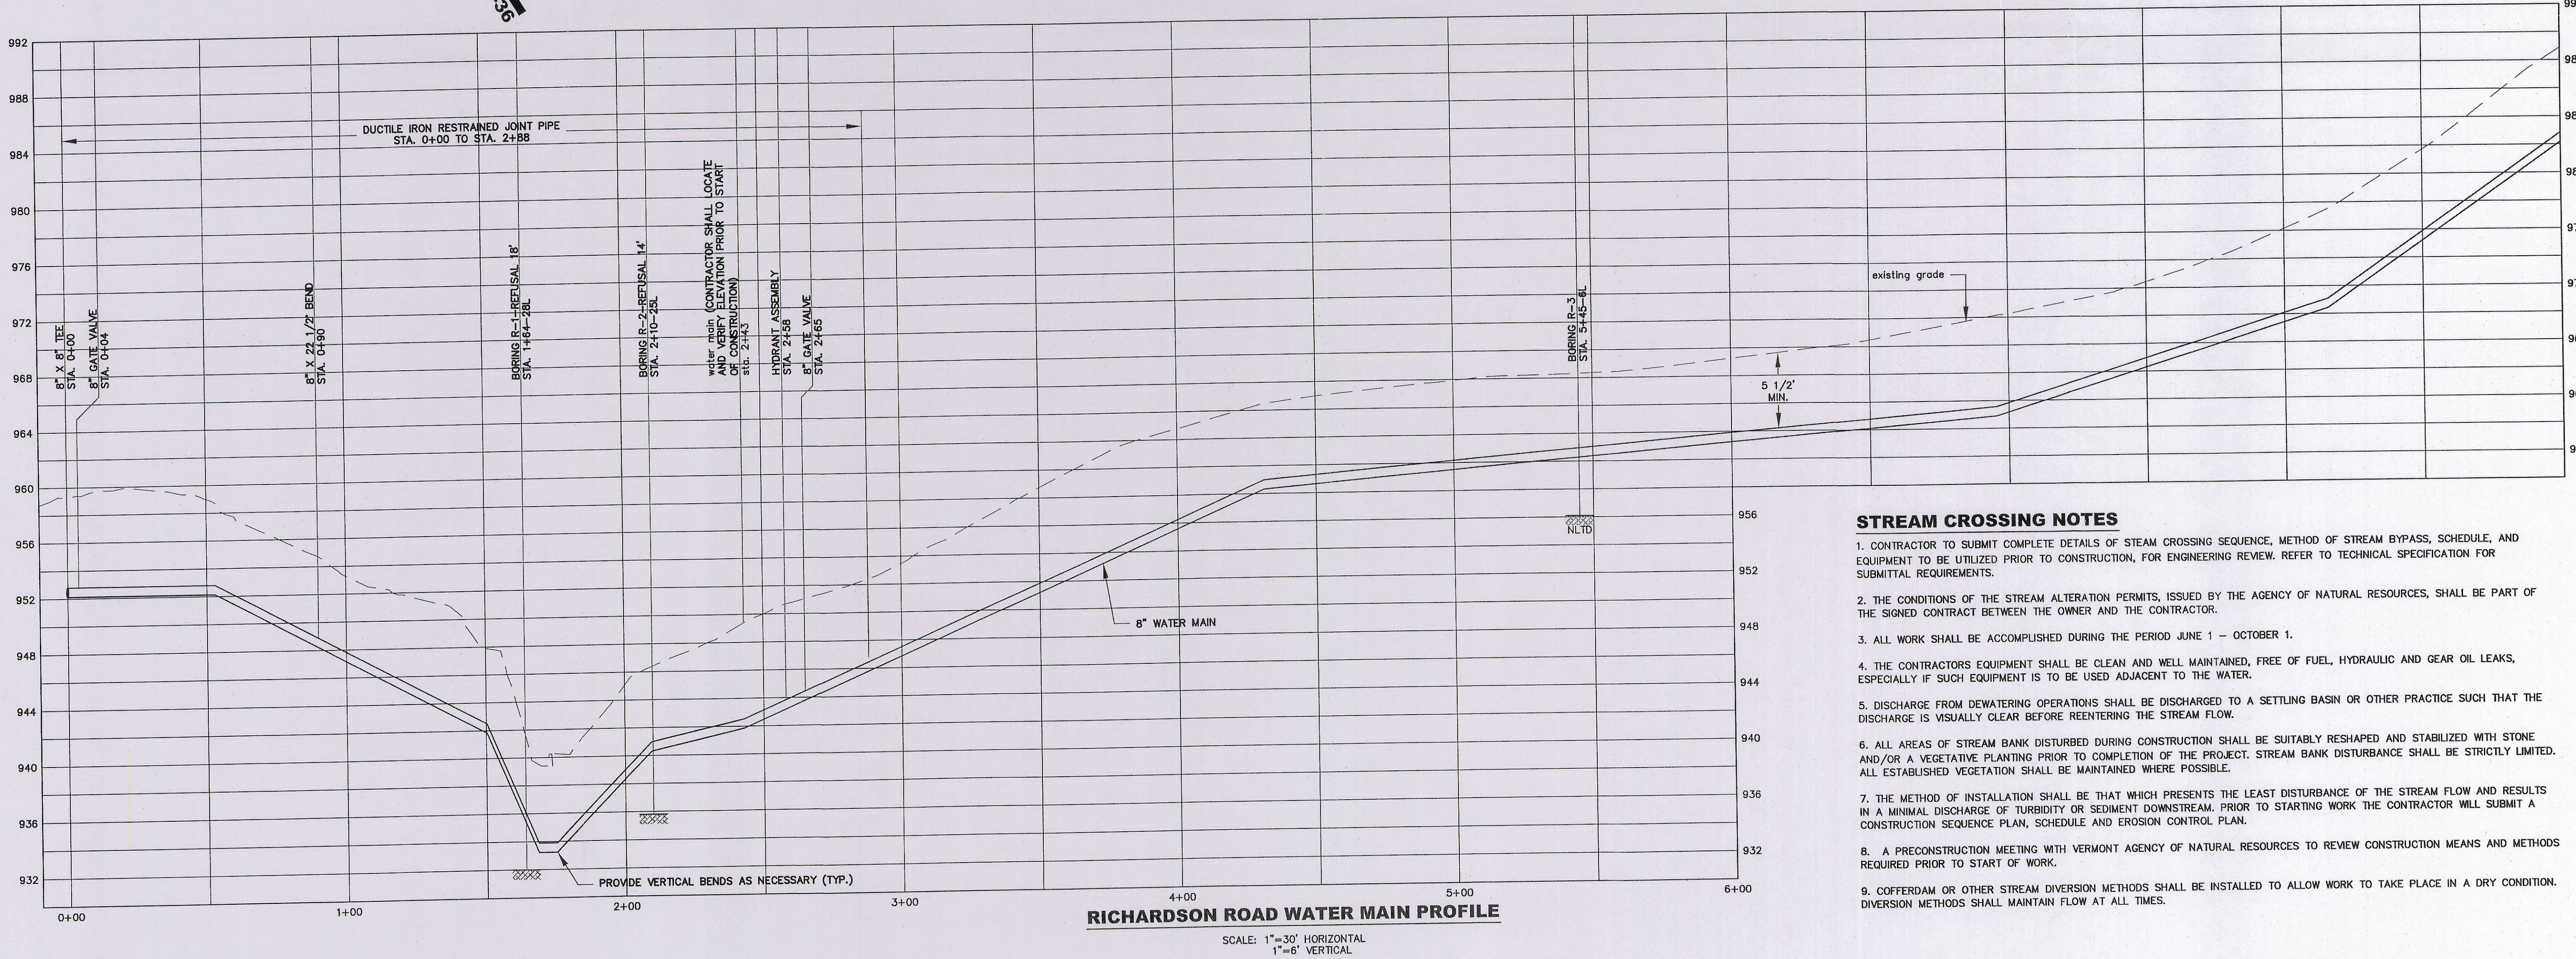

### STREAM CROSSING NOTES

1. CONTRACTOR TO SUBMIT COMPLETE DETAILS OF STREAM CROSSING SEQUENCE, METHOD OF STREAM BYPASS, SCHEDULE, AND EQUIPMENT TO BE UTILIZED PRIOR TO CONSTRUCTION, FOR ENGINEERING REVIEW. REFER TO TECHNICAL SPECIFICATION FOR SUBMITTAL REQUIREMENTS.
2. THE CONDITIONS OF THE STREAM ALTERATION PERMITS, ISSUED BY THE AGENCY OF NATURAL RESOURCES, SHALL BE PART OF THE SIGNED CONTRACT BETWEEN THE OWNER AND THE CONTRACTOR.
3. ALL WORK SHALL BE ACCOMPLISHED DURING THE PERIOD JUNE 1 - OCTOBER 1.
4. THE CONTRACTORS EQUIPMENT SHALL BE CLEAN AND WELL MAINTAINED, FREE OF FUEL, HYDRAULIC AND GEAR OIL LEAKS, ESPECIALLY IF SUCH EQUIPMENT IS TO BE USED ADJACENT TO THE WATER.
5. DISCHARGE FROM DEWATERING OPERATIONS SHALL BE DISCHARGED TO A SETTLING BASIN OR OTHER PRACTICE SUCH THAT THE DISCHARGE IS VISUALLY CLEAR BEFORE REENTERING THE STREAM FLOW.
6. ALL AREAS OF STREAM BANK DISTURBED DURING CONSTRUCTION SHALL BE SUITABLY RESHAPED AND STABILIZED WITH STONE AND/OR A VEGETATIVE PLANTING PRIOR TO COMPLETION OF THE PROJECT. STREAM BANK DISTURBANCE SHALL BE STRICTLY LIMITED. ALL ESTABLISHED VEGETATION SHALL BE MAINTAINED WHERE POSSIBLE.
7. THE METHOD OF INSTALLATION SHALL BE THAT WHICH PRESENTS THE LEAST DISTURBANCE OF THE STREAM FLOW AND RESULTS IN A MINIMAL DISCHARGE OF TURBIDITY OR SEDIMENT DOWNSTREAM. PRIOR TO STARTING WORK THE CONTRACTOR WILL SUBMIT A CONSTRUCTION SEQUENCE PLAN, SCHEDULE AND EROSION CONTROL PLAN.
8. A PRECONSTRUCTION MEETING WITH VERMONT AGENCY OF NATURAL RESOURCES TO REVIEW CONSTRUCTION MEANS AND METHODS REQUIRED PRIOR TO START OF WORK.
9. COFFERDAM OR OTHER STREAM DIVERSION METHODS SHALL BE INSTALLED TO ALLOW WORK TO TAKE PLACE IN A DRY CONDITION. DIVERSION METHODS SHALL MAINTAIN FLOW AT ALL TIMES.

**OTTER CREEK ENGINEERING**  
404 East Main Street  
P.O. Box 712  
East Middlebury, VT 05740  
Telephone: 802-382-8522  
Fax: 802-382-8440  
110 Merchants Row  
4th Floor, Suite 15  
Rutland, VT 05701  
Telephone: 802-747-3080  
Fax: 802-747-4820  
E-mail: info@ottercrk.com

STAMP AND SIGNATURE:

DESIGN ENGINEER

THESE DRAWINGS SHALL NOT  
BE ALTERED IN ANY WAY  
WITHOUT THE WRITTEN  
APPROVAL OF THE ENGINEER.  
ANY REVISIONS SHALL BE  
MADE BY THE ENGINEER AND  
NOTED IN THE REVISION  
BLOCK. © 2014

OTTER CREEK ENGINEERING, INC.

GRID NORTH

**TOWN OF BERLIN**  
**BERLIN CORNERS**  
**MUNICIPAL WATER SYSTEM**  
**BERLIN, VERMONT**

**CONSTRUCTION**

DATE ISSUED: 11/5/2014

REVISIONS:

ADDED WATER MAIN	4-1-15 HB
------------------	-----------

DRAWN BY: HB

CHECKED BY: MY

SCALE: 1"=30'

PROJECT NO.: 519-002

CADD FILE: 519-002

TITLE:

**RICHARDSON ROAD**  
**WATER MAIN PLAN**  
**AND PROFILE**

DRAWING NO.

**C-36A**