



**Vermont Department of Environmental Conservation**  
 Watershed Management Division  
 1 National Life Drive, Main 2  
 Montpelier VT 05620-3522  
 www.watershedmanagement.vt.gov

Agency of Natural Resources

[phone] 802-828-1535  
 [fax] 802-828-1544

**AUTHORIZATION TO CONDUCT NEXT FLOOD MEASURES**  
 Pursuant to Section F of the Vermont Stream Alteration General Permit

Project Number: SA-06- 39 -2015  
 Applicant Name: Felicia Messuri Phone: (802) 595-1144  
 Mailing Address: 275 Main St., Montpelier, VT 05602  
 Project Location: " " " " " (44.2632, -72.5580)  
 Email: FeliciaM124@Comcast.net

The Secretary of the Vermont Agency of Natural Resources (VT ANR) has determined that:

1. This project authorizes 40 lb. bank armoring, gravel removal, stream relocation  
and bridge repairs
2. The proposed activity is eligible for coverage under the VT ANR Stream Alteration General Permit – Next Flood Measures.
3. The proposed activity will meet the terms and conditions of Section F of the General Permit provided:
  - a) The project will be completed and approved as shown on the plan dated 07/30/2015, prepared by BJ, and approved by the Vermont Agency of Natural Resources.
  - b) The project is proportional to the threat and conditioned to cease when the threat to life or to improved property has ended.
  - c) The project will not result in a threat to life, public health or safety.
  - d) The project will meet the standards detailed in subsection E.2.1 and E.2.2 of the General Permit.
  - e) The project will meet Stream Alteration Standards to the greatest extent possible.
  - f) A pre-construction meeting is held between the contractor, owner/applicant, and the ANR River Management Engineer.
  - g) The River Management Engineer is notified by phone or email when construction begins and when the project is complete.

If there are any changes in the project plan or deviation in construction from the plan, the Permittee must notify the River Management Engineer immediately.


If the project is constructed as you have described, as shown on the above referenced approved plans and according to the above conditions, there is no reason to expect any violation of Vermont Water Quality Standards.

Signed this 30<sup>th</sup> day of July, 2015  
 David K. Mears, Commissioner  
 Department of Environmental Conservation

This permit expires October 1, 2015.

by: BJ  
 Jaron Borg, River Management Engineer

275 Main St.  
 Montpelier, VT 05602  
 07/30/2015  
 [Signature]

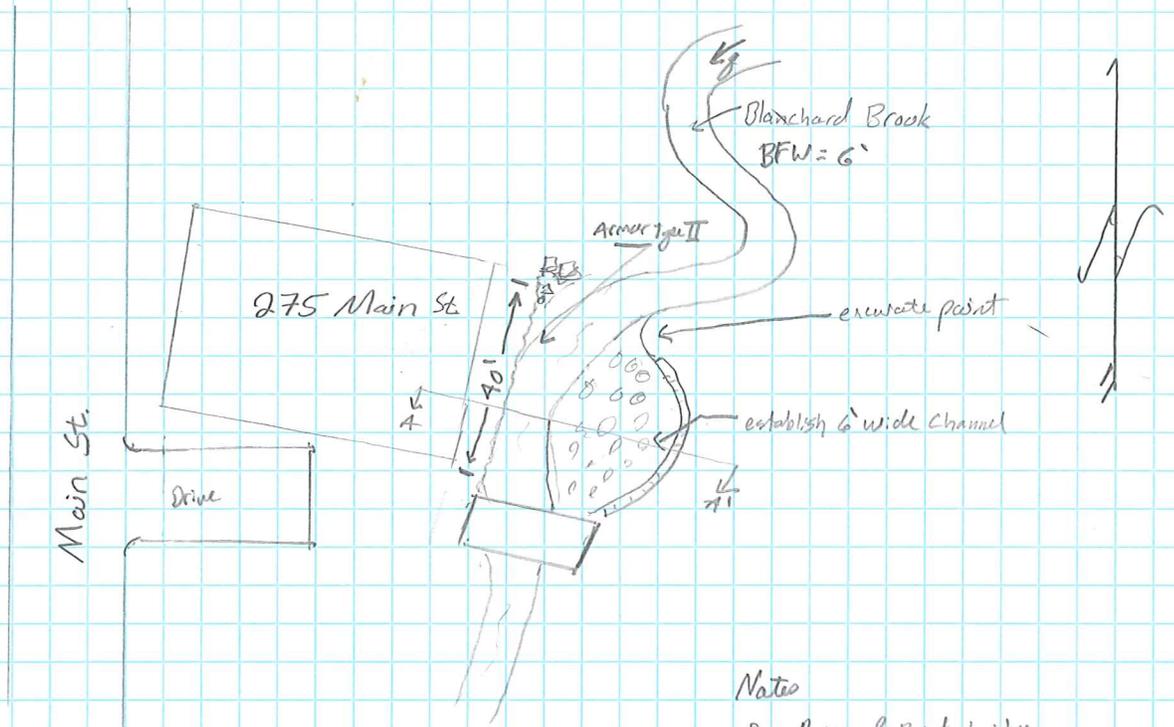


Notes

- Remove & Reset bridge at current location
- excavate 6' channel along laid up stone wall
- hard armor exposed bank by house with type II stone
- excavate point upstream of gravel deposit to 6" above water level

A

A1

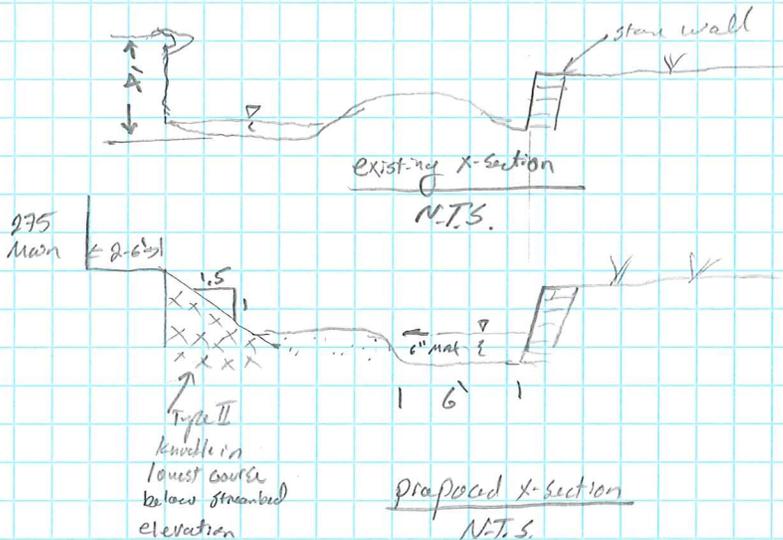

**APPROVAL**  
**WATERSHED MANAGEMENT DIVISION**

DATE 07/30/2015

BY [Signature]  
 THIS APPROVAL IS SUBJECT TO THE TERMS  
 AND CONDITIONS OF STREAM ALTERATION  
 PERMIT # SA-06-39-2015 ISSUED HEREWITH