SA-07-001-2015
Bridge #7 Route 9
Town of Bennington
Barney Brook

01/07/15
Josh Carvajal

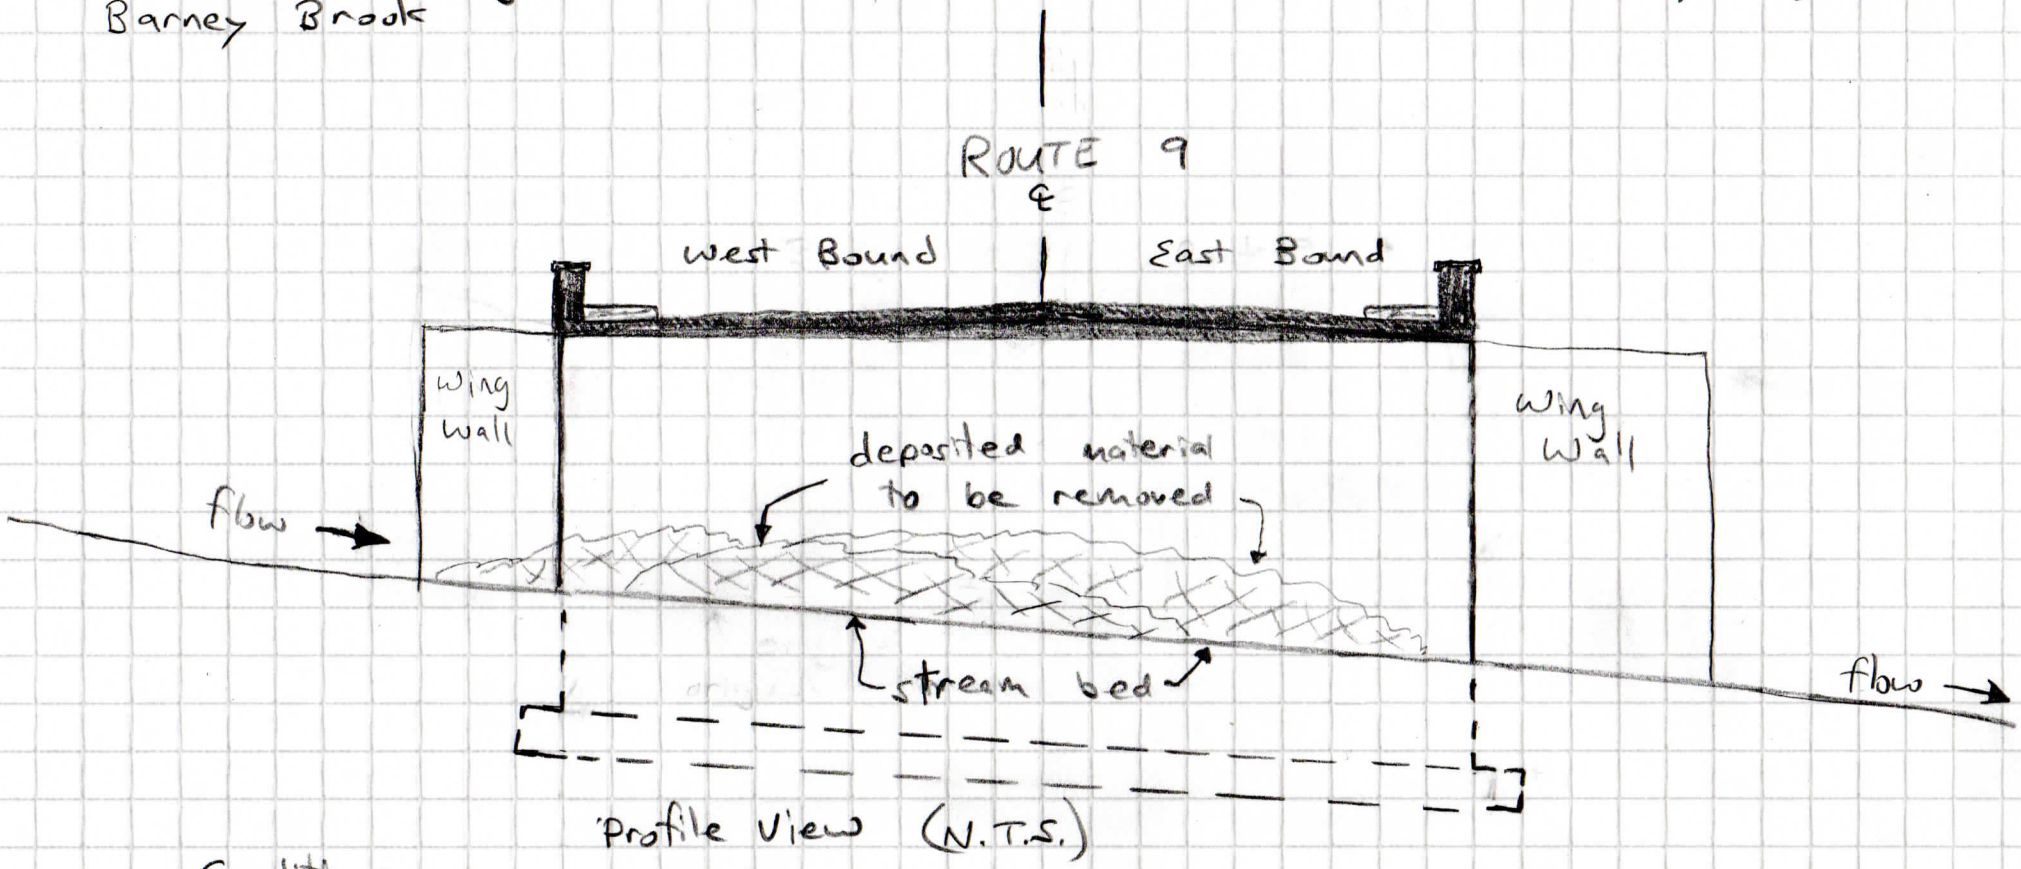

Profile View (N.T.S.)

Conditions:

- Bypassing of stream flows is required to ensure materials being excavated are isolated from flowing water
- Final bed slope under bridge should match upstream and downstream elevations to maintain a constant stream slope
- Sandbagging to redirect stream flow away from work area is acceptable for minimizing impacts to VT Water Quality Standards